

EASY TO INSTALL
WITH QUICK RELEASE CLIPS



PIERLITE ECO LED BATTEN GENII

Designed with the professional installer in mind with quick to fit one piece sealed LED module.
Next Gen — more efficient, longer life, improves Australia's favourite LED batten.

PIERLITE ECO LED BATTEN GENII

ECO LED Batten is the ideal batten for clean, even light distribution. Available in 3 sizes and wattages with 2 colour temperature options, it's modular style fuses form with function.

FEATURES

- Quick and easy to install with unpluggable LED module and captive end caps
- Insect proof sealed LED module
- Wide steel body covers up conventional batten fixing points
- 20mm knockout for conduit or cable glands from end or rear
- Available in 3 sizes: 1500mm, 1200mm, 600mm
- 2 colour options: 4000K and 6500K
- Power outputs: 20W or 40W or 50W
- 54,000 hours to L70, LLMF**
- 3 year warranty[†]

BENEFITS

- Excellent and even light distribution
- Quick and easy to install
- Various size options provide more flexibility
- Designed to replace conventional battens

SPECIFICATIONS

- Voltage: 240V
- Power Factor: min 0.9
- Ingress Protection: IP20
- Ambient Temperature: Ta40
- Colour Rendering Index: CRI>80
- Beam distribution: 120°
- Available in 3 sizes & 2 colour
 - 20W: 600mm & 1200mm - 4000K, 6500K
 - 40W: 1200mm - 4000K, 6500K
 - 50W: 1500mm - 4000K, 6500K
- Non Dimmable

APPLICATIONS

Commercial, retail and residential applications





Easy to install with un-pluggable LED module



Captive end caps



20mm knockouts for conduit or Cable Glands

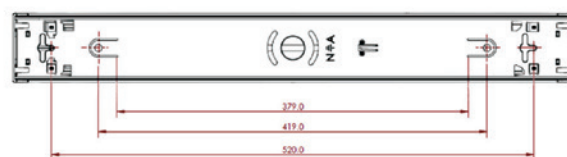

PRODUCT CODE	DESCRIPTION	WATTAGE	LUMEN	COLOUR TEMP	DIMMENSION (MM)	MASS (KG)	DIMMABLE
ECOBAT202E4	ECO LED BATTEN	20W	2080lm	4000K	L603xW74x H74	1.00	No
ECOBAT202E6	ECO LED BATTEN	20W	1990lm	6500K	L603xW74x H74	1.00	No
ECOBAT204E4	ECO LED BATTEN	20W	2170lm	4000K	L1164x W74x H74	1.80	No
ECOBAT204E6	ECO LED BATTEN	20W	2090lm	6500K	L1164x W74x H74	1.80	No
ECOBAT404E4	ECO LED BATTEN	40W	4010lm	4000K	L1164x W74x H74	1.80	No
ECOBAT404E6	ECO LED BATTEN	40W	3940lm	6500K	L1164x W74x H74	1.80	No
ECOBAT505E4	ECO LED BATTEN	50W	4760lm	4000K	L1500x W74x H74	2.50	No
ECOBAT505E6	ECO LED BATTEN	50W	4510lm	6500K	L1500x W74x H74	2.50	No

ACCESSORIES

PRODUCT CODE	DESCRIPTION
WG2	Wire Guard 603mm
WG4	Wire Guard 1164mm



[†]Rated average design life is based on application of PIERLITE's product operating and maintenance guidelines; see www.gerardlighting.com.au. Actual product life may vary dependent upon frequency of maintenance and product application.
^{**}LLMF - Lamp Lumen Maintenance Factor. [†]Gerard Lighting terms and conditions apply.



PIERLITE is a registered trademark of Gerard Lighting Pty Ltd ©Copyright PIERLITE 2017
gerardlighting.com.au